


# TrueNet®

## 24 Port Fibre Optic Metal Split Patch Panel

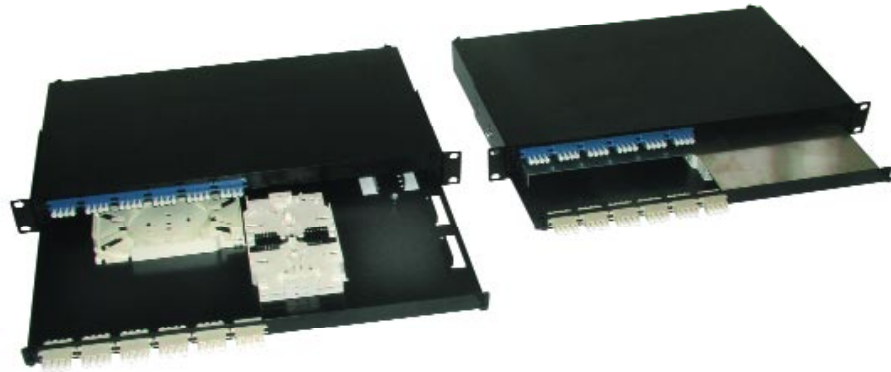

The TrueNet® 24 Port Fibre Optic Metal Split Patch Panel from ADC KRONE is a modular patch panel offering the versatility to select differing modes of connectivity in the same 1U housing. The unique design brings the benefit of minimal down time and disturbance to neighbouring Optical LAN's through the split panel approach.

For many years it has been recognised that on-site splicing can cause faults on adjacent fibres. To minimise this, fibre management protocol demands less fibre splices per location so reducing the opportunity for upgrade derived installation faults. The 7033 1 015-XX family of Split Patch Panels has been designed with this in mind whilst still delivering a high level of port density per 'U' spacing.

### Features

- Per port labelling.
- Reinforced stainless steel casing.
- Fibre connectivity:
  - 24 x MTRJ, or
  - 24 x LC – Multimode or Singlemode.
- Anti-tamper lid screwed to each tray.
- 2 discrete trays (2x12 outlets).
- Internal cable management.

### Benefits

- Versatile connectivity selection (LC and MT-RJ)
  - Allows interfacing to both legacy 1 Gigabit Ethernet (1 G E) networks and new 10 G E network using small form factor connectors.
- Unique Split Tray design reduces disturbance to neighbouring optical channels by reducing the number of parallel splice points in a 1U bay.
- Internal cable management protects splices and pigtailed from lateral damage whilst maintaining the bend radii for optimal data packet throughput.
- An 'anti tamper' lid is screwed to each tray preventing accidental intrusion into the Splice Bay area by Operators or Technicians.
- Forms the basic design for ADC KRONE's Intelligent Patching solution, so offers a later upgrade path with minimal network re-design.

### Applications

- Multi-Tenant Units (MDU's)
- Campus LAN
- Optical Cross Connects
- Fibre to the Riser
- Storage Area Networking

TECHNICAL DATA



**Technical Assistance:**  
**Europe & Middle East**  
+32 2 712 6542  
euro.tac@adckrone.com  
www.adckrone.com

**South Africa**  
+27 11 466 3333  
infos@adckrone.com

**United Kingdom**  
0800 960236  
contactuk@adckrone.com

## Ordering Information

| Description                              | Catalogue Number |
|--|------------------|
| Split Patch Panel, 2 Trays MT-RJ         | 7033 1 015-00    |
| Split Patch Panel, 2 Trays LC Multimode  | 7033 1 015-02    |
| Split Patch Panel, 2 Trays LC Singlemode | 7033 1 015-01    |

## Specifications

|                   |                                       |
|-------------------|---------------------------------------|
| Width:            | 19"                                   |
| Depth:            | 270mm                                 |
| Height:           | 1U                                    |
| Weight:           | 3.6Kg                                 |
| Materials:        | Zintec – powder coated black RAL 9011 |
| Number of trays:  | 2 discrete (1U height)                |
| Capacity:         | 48 fibre max (LC/MT-RJ)               |
| Connector system: | LC/MT-RJ                              |
| Cable management: | Internal                              |

## Connector Specification

| Connector | Characteristic             | Singlemode | Multimode       | Operating Temperature | Storage Temperature |
|-----------|----------------------------|------------|-----------------|-----------------------|---------------------|
| LC        | Sleeve Material            | Ceramic    | Phosphor Bronze | -40 to +75°C          | -55 to +85°C        |
|           | Typical Insertion Loss, dB | 0.2        | 0.3             |                       |                     |
| MT-RJ     | Typical Insertion Loss, dB | 0.2        | 0.2             |                       |                     |

## Environmental Standards

|               |               |                      |
|---------------|---------------|----------------------|
| - EN 6008-2-2 | - IEC 68-2-27 | - IEC 68-2-6         |
| - IEC 68-2-14 | - IEC 68-2-3  | - ISO/IEC 11801:2002 |

TECHNICAL DATA



**Web Site:** [www.adckrone.com](http://www.adckrone.com)

**UK Office:** ADC Communications (UK) Ltd., Runnings Road, Kingsditch Trading Estate, Cheltenham, Gloucestershire GL51 9NQ, United Kingdom • Phone: +44 (0) 1242 264 400 Fax: +44 (0) 1242 264 488 contactuk@adckrone.com

**South African Office:** ADC Telecommunications (Africa) PTY Ltd., 16 Brand Hatch Close, Kyalami Business Park, Midrand, 1685, Johannesburg, South Africa • Phone: +27 11 466 3333 Fax: +27 11 466 3300 Email: infosa@adckrone.com

**EMEA Office:** ADC GmbH, Beeskowdamm, 3-11, 14167 Berlin, Germany • Phone: +49 30 8453 1818 Fax: +49 30 8453 1703. For a listing of all ADC KRONE's global sales office locations, please refer to our web site.

Specifications published here are current as of the date of publication of this document. Because we are continuously improving our products, ADC KRONE reserves the right to change specifications without prior notice. At any time, you may verify product specifications by contacting ADC GmbH headquarters in Berlin. ADC Telecommunications, Inc. views its patent portfolio as an important corporate asset and vigorously enforces its patents.

**Part Number 134061EN Jul 07 Revision © 2007 ADC Communications (UK) Ltd. All Rights Reserved**